


## RCS - REDUCER SYMMETRIC SEGMENTED

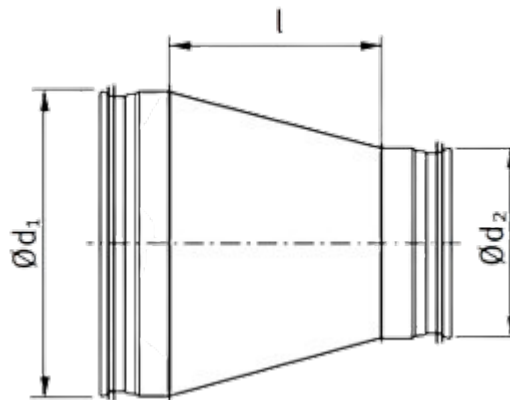

- Galvanised steel
- EPDM rubber gasket
- Segments are connected with lock
- Approximately 18° angle
- Gasket is positioned by returned edges

$\varnothing d_1$	$\varnothing d_2$	l (mm)	weight (kg)	$\varnothing d_1$	$\varnothing d_2$	l (mm)	weight (kg)
355	200	243	1,71	500	315	289	3,16
355	250	174	1,56	500	355	234	2,89
355	315	85	1,21	500	400	177	2,69
400	200	310	2,31	500	450	109	2,37
400	250	241	2,20	560	355	317	3,85
400	315	152	1,86	560	400	260	3,66
400	355	97	1,55	560	450	191	2,70
450	200	378	2,99	560	500	122	2,86
450	250	310	2,85	630	250	557	5,60
450	315	221	2,50	630	355	413	4,99
450	355	166	2,24	630	400	356	4,79
450	400	109	2,64	630	450	287	4,46
500	200	447	3,66	630	500	219	4,00
500	250	378	3,51				